

**621.762**

,

$$\cdot \cdot \cdot ( \cdot \cdot \cdot , \cdot \cdot \cdot )$$

-20

,

: , , , ,

**1.**

,

( , , , ).

,

, ( , ),

( , ), [1,2]

(

, , .), , ,

,

( , , , .).

**2.**

,

( =0,9÷0,95).


30 - 55%


-

( 30 - 50), ( , , , , )

-



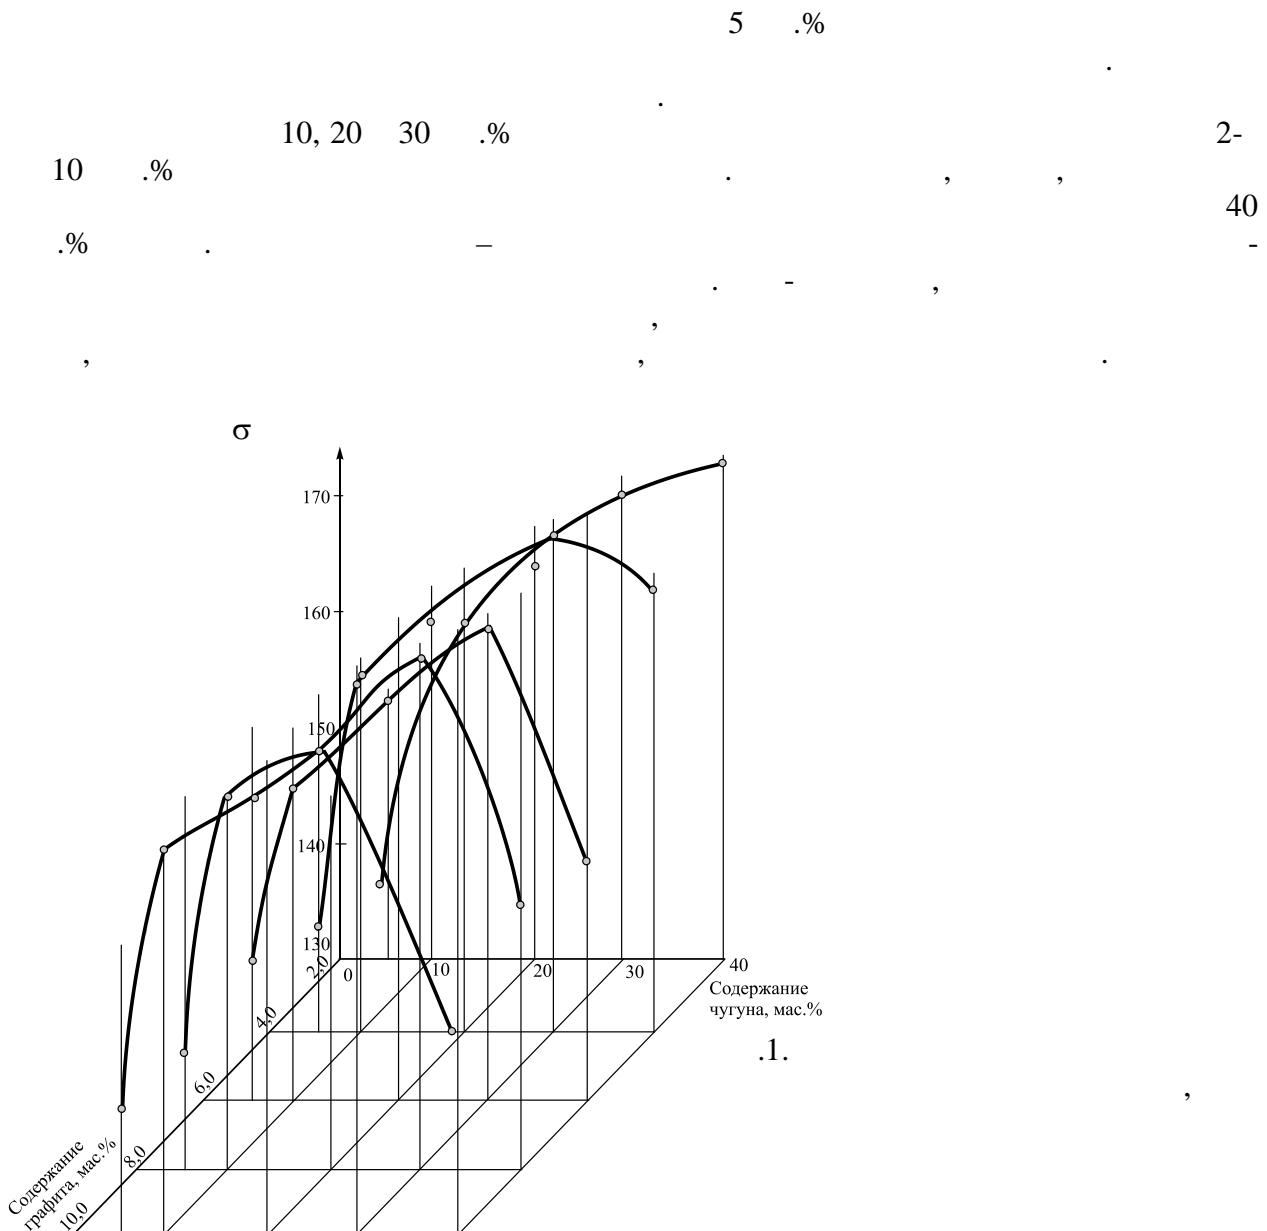

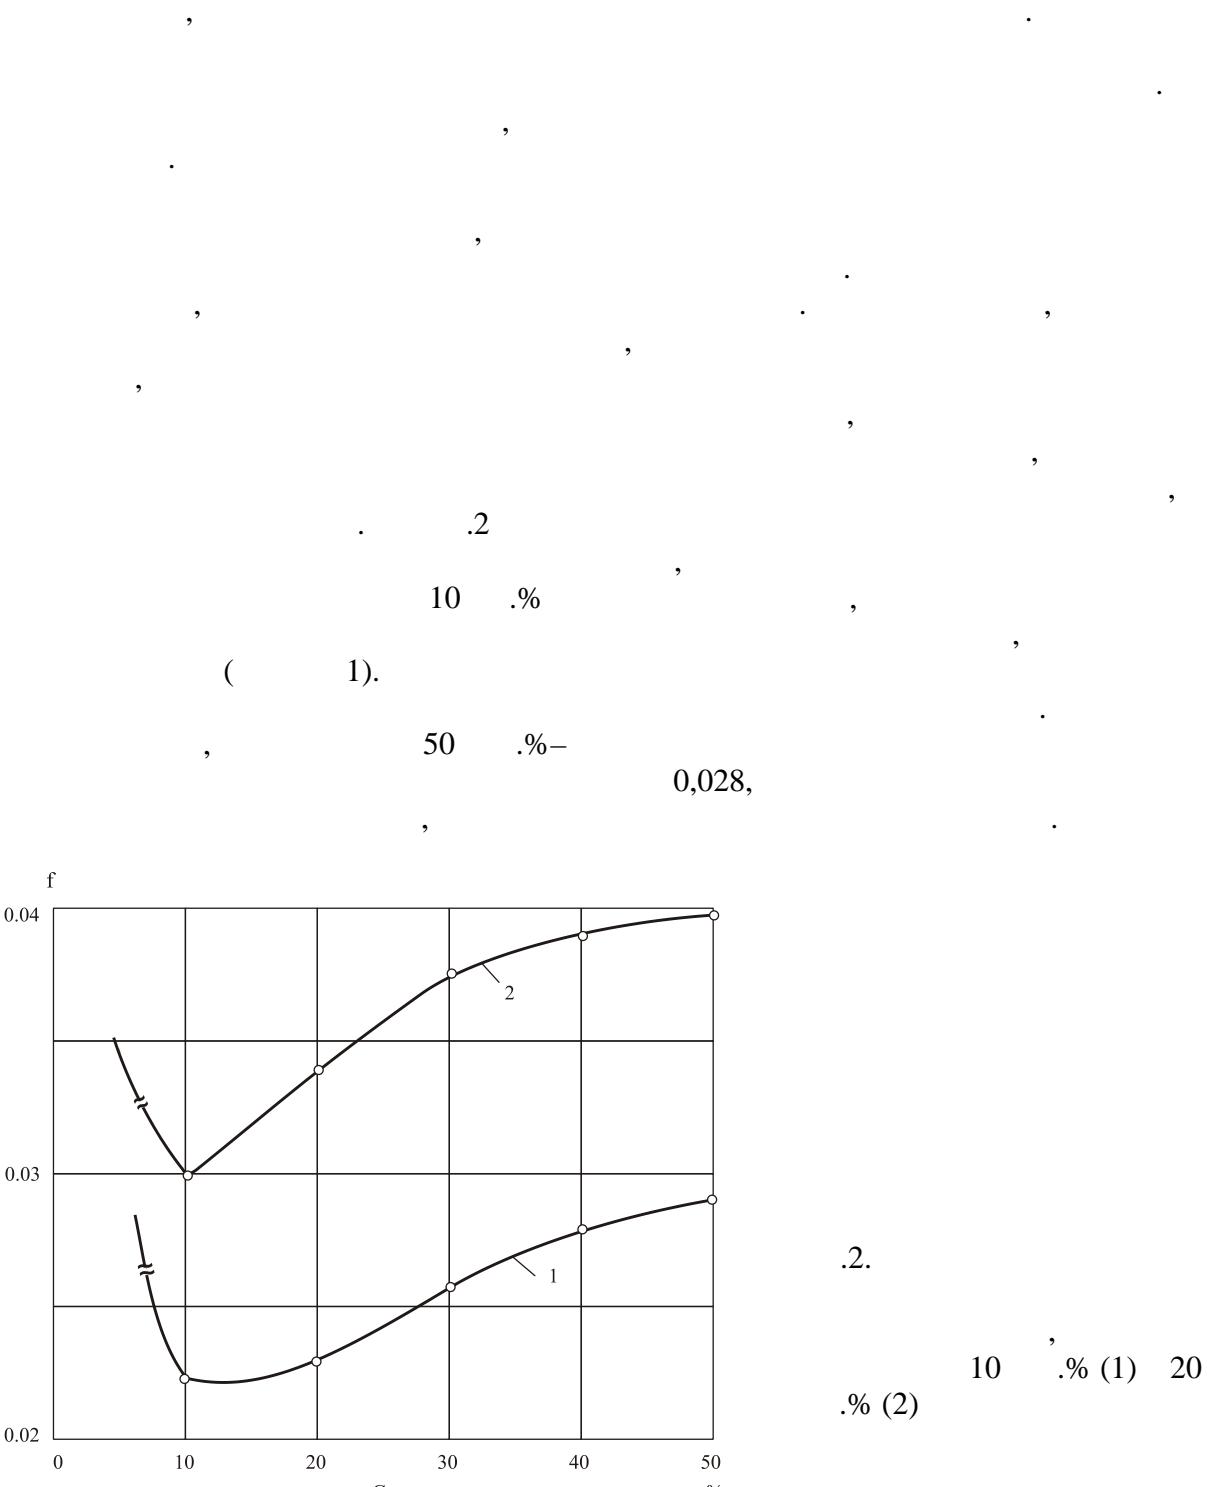

.2.  
 10 .% (1) 20  
 .% (2)

20 .%

( 2),

( , ) . 50 .%—

0,04,

3.

29.04.2010 .

## METALLOPOLYMERS ON BASE EPOKSIDERESIN WHICH USED IN SHIPBUILDING

*Bashirov I.F. (Azerbaijan Technikal Universiny, Baku, Azerbaijan)*

In the article studied the case applicity metallpolymers on base epokside – resin in shipbuilding. The powders metallic jilling have been from chipping departure cast –iron and solid– lubricant has used coppering species. Investigated from the depending mechanical and tribotechnical properties from quantity coppering cast iron and graphite

**Key words:** metallopomerpokside, chipping departure cast-iron, coppering cast-iron and grafite, solid lubricant, economical advantages